


SL-T3528IR-940-1.4



Absolute Maximum Ratings at Ta=25


1. Storage and operating:

2. Peak Forward Current:

3. Caution in ESD:


Electrical Optical Characteristics at Ta=25

Note:

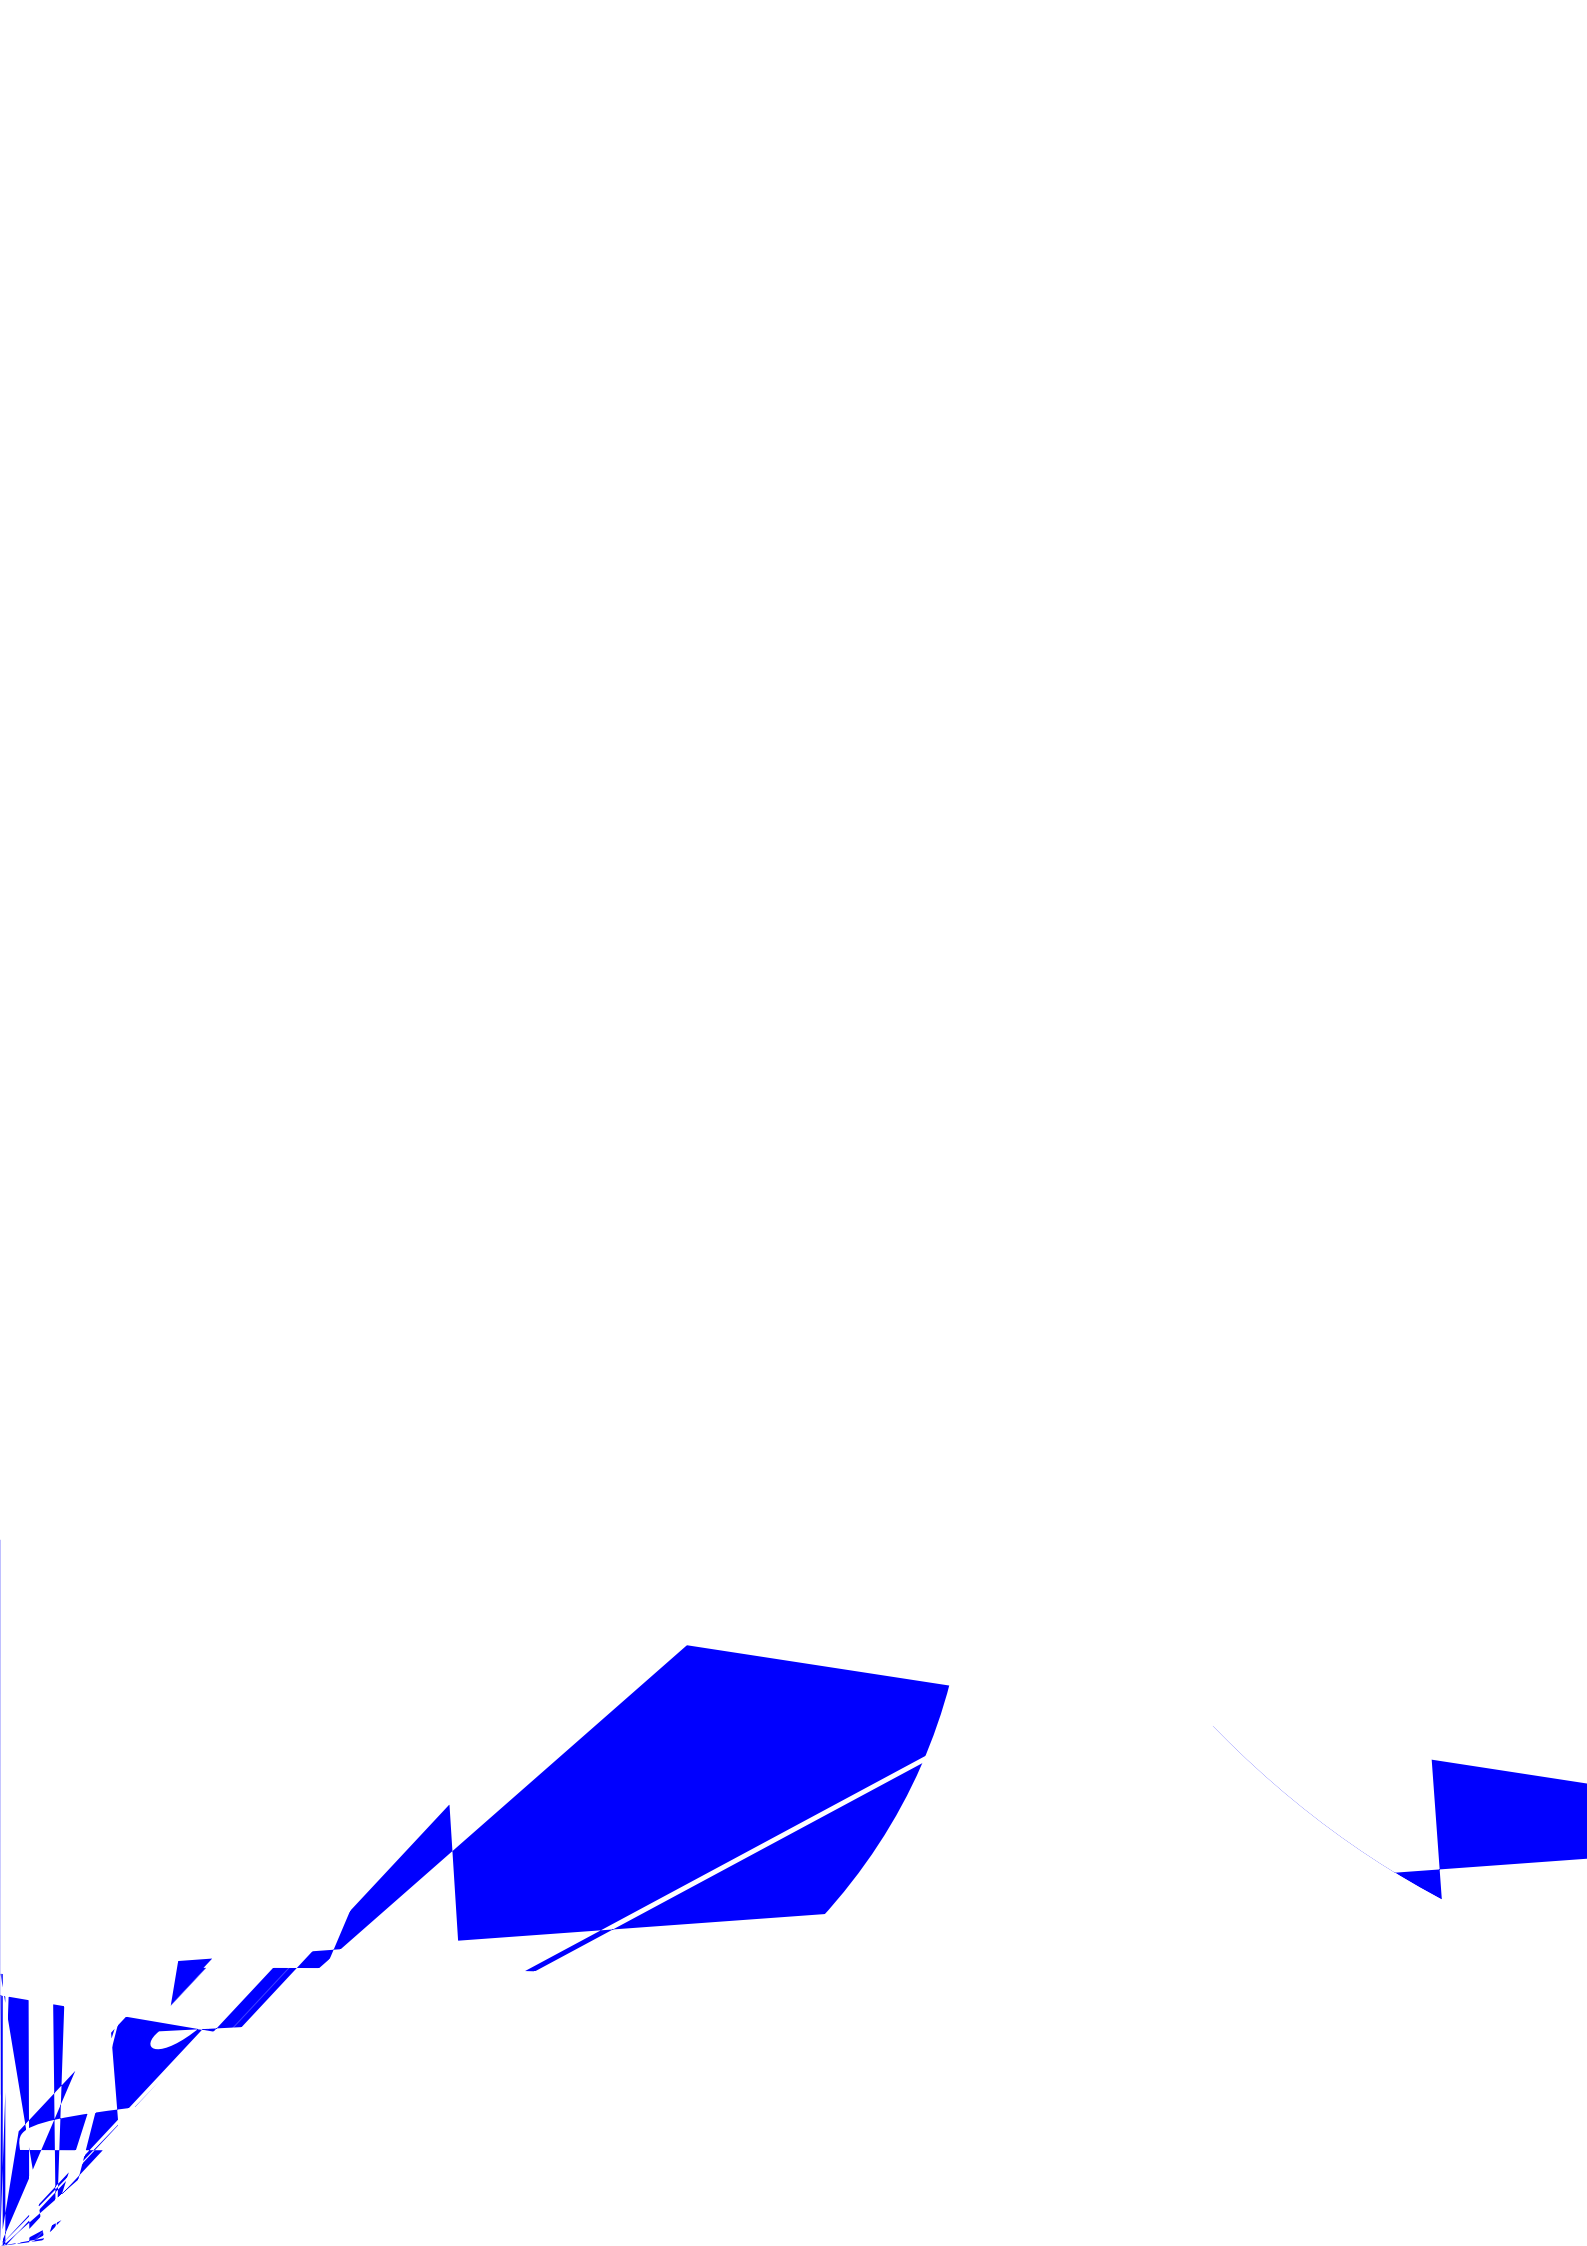

	1.7	1.8
	1.8	2.0
	2.0	2.3
	2.3	2.8

NOTE

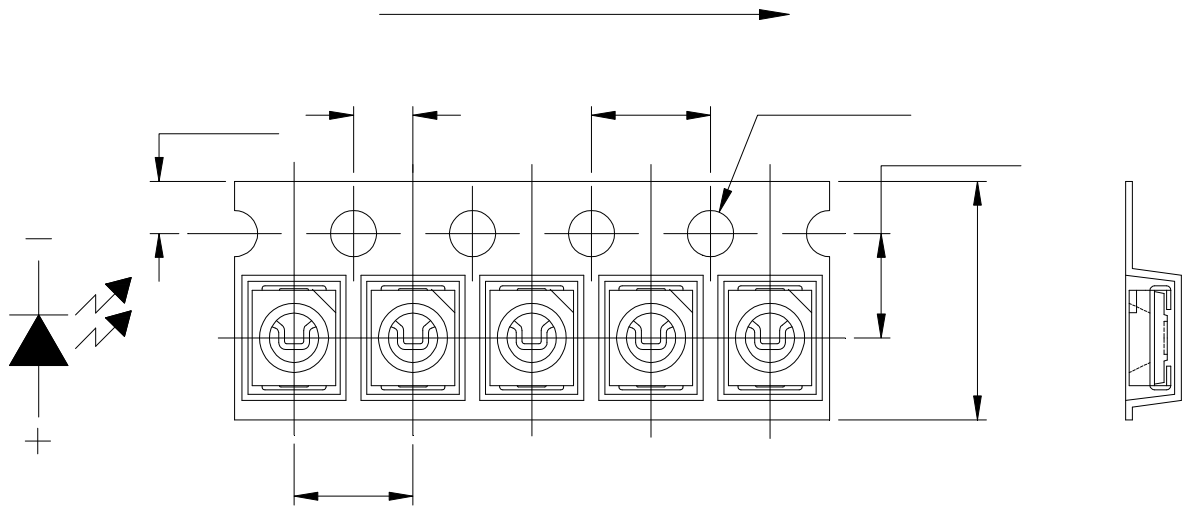

Note:

LIGHT

