


LI

No.

BB120-L37

Typical Electrical / Optical Characteristics Curves (25°C Ambient Temperature Unless Otherwise Noted)

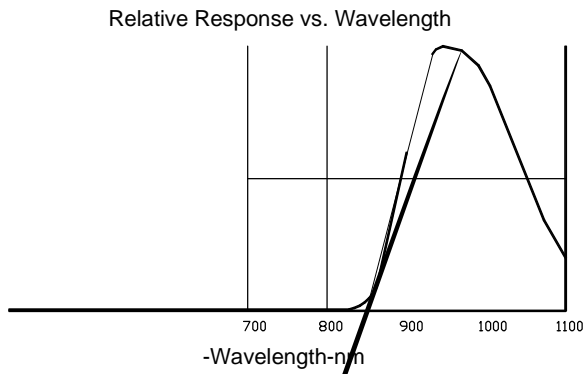

Infrared Pho

Commodity: Infrared Photo diode

Reverse Light Current Bin Limits

| BI N CODE | Min. (A) | Max. (A) |
|-----------|----------|-----------|
| 1 | 26 | 31 |
| 2 | 31 | 37 |
| 3 | 37 | 44 |
| 4 | 44 | 53 |

NOTE: The I_L guarantee should be added $\pm 15\%$ tolerance.

Label Example



LIGHT Universal Label



Customer Defined Label



Carrier Tape Specification

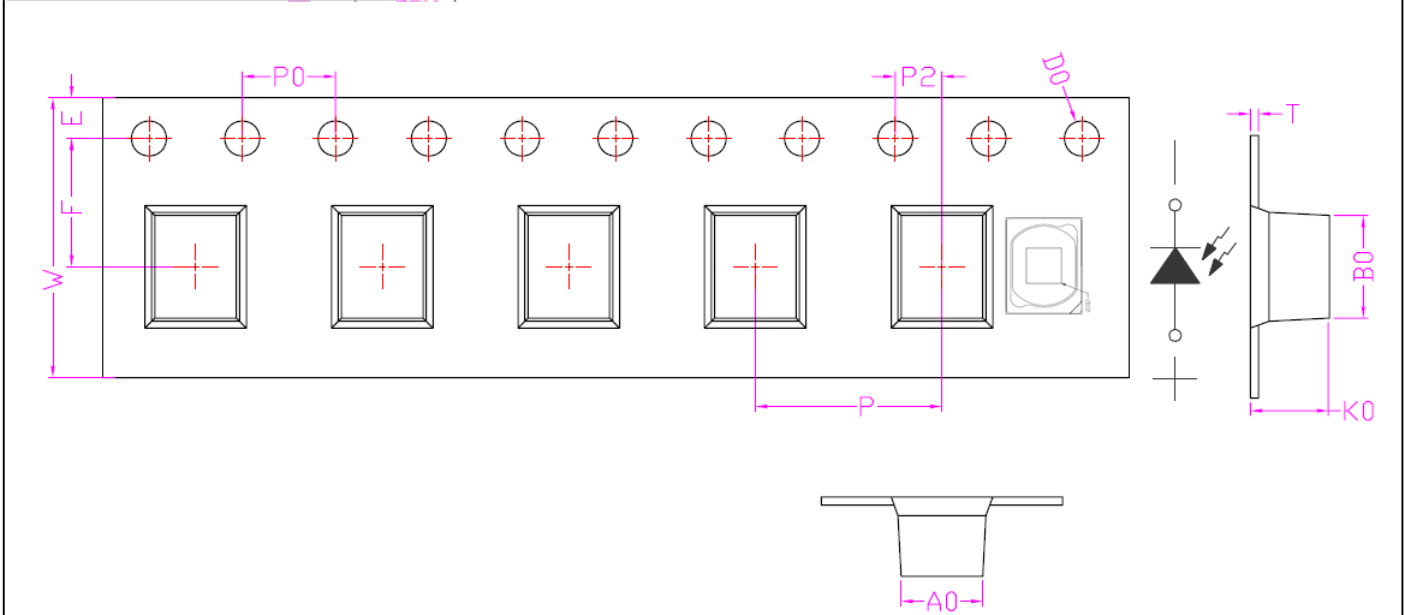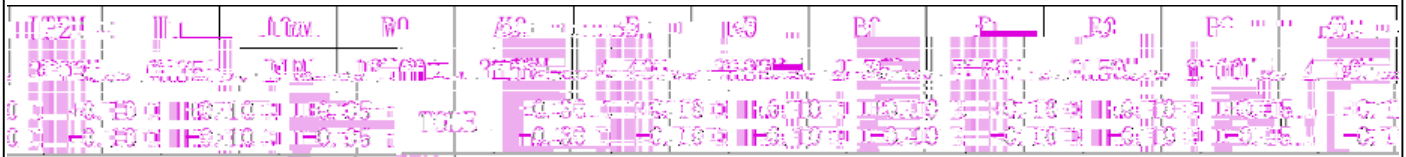

Note: Tolerance unless mentioned is ± 0.1 mm; Unit = mm

Mo

